

Meccano Super Model No. 4

Giant Block-setting Crane

ON every coast line, no matter which one you take, you will always find a few natural harbours.

This rule applies equally to the coasts of the British Isles. Good examples are given by Southampton Water on the south coast and Milford Haven on the west, but if we relied solely on natural harbours we should be very badly off. In olden times these natural harbours were sufficient for our small fleets, but as times changed more harbours became necessary. So artificial means had to be brought into use where nature would not oblige. The breakwaters which are constructed must be capable of withstanding an enormous pressure caused by the waves. It is not generally realised what force waves can exert, but when a breakwater weighing 3,300 tons has been moved bodily by the action of the waves we can understand that breakwater construction is by no means an easy task to complete efficiently. Knowing they have to contend with such a great force, engineers have consequently to design their breakwaters on a large scale. Some of the most well-known artificial harbours are those at Portland and Dover, while every boy has heard of the famous Mole at Zeebrugge. We would naturally expect that such huge structures would demand huge machinery to construct them, and this is actually the case. Cranes capable of lifting blocks of concrete and granite weighing anything up to about 50 tons have to be made, and some of the largest cranes in existence are those used in harbour construction.

This magnificent model is a reproduction of one of the huge Titan block-setting cranes that have been illustrated and described from time to time in the "M.M." and which, as we have often pointed out in the "M.M.," form one of the most suitable subjects for reproduction in Meccano. This particular crane is one of the finest examples of its type, and has several distinct movements. It is equipped with Fidler's block-setting gear, which depends from a trolley that is drawn along a pair of rails on the upper side of the boom. The boom itself can be swivelled in any direction by means of an Electric Motor, and the entire crane is capable of travelling under its own power on four

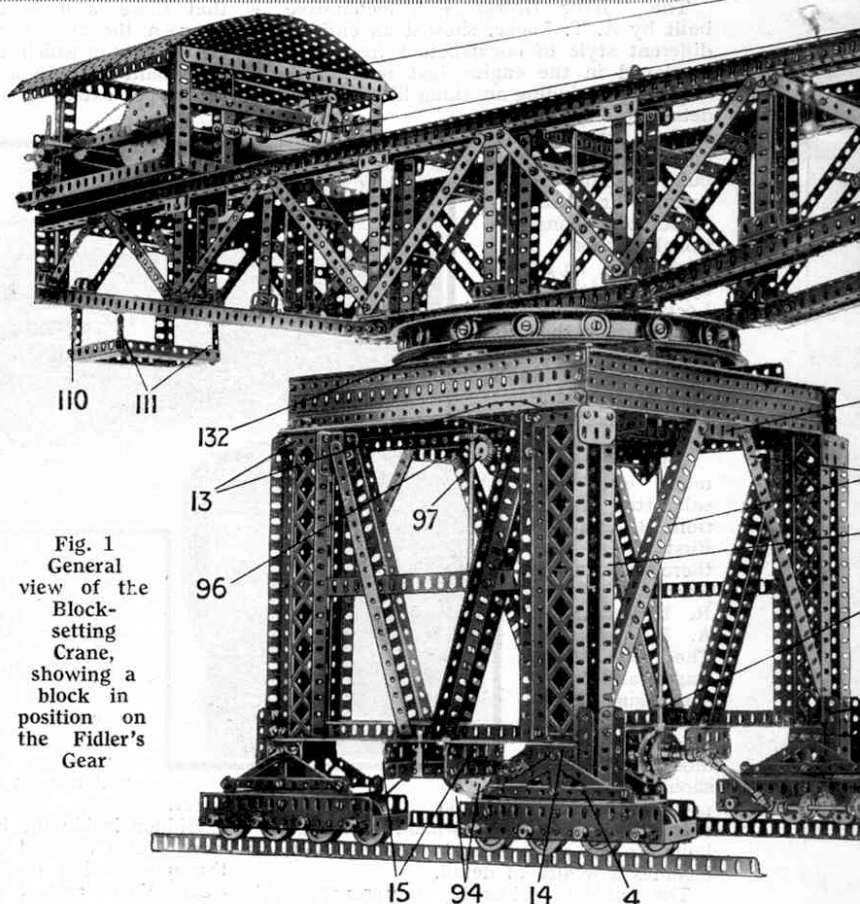


Fig. 1
General
view of the
Block-
setting
Crane,
showing a
block in
position on
the Fidler's
Gear

separately-propelled bogies—every action, in fact, which can be carried out by the actual crane, is reproduced in the Meccano model.

The Meccano Model

The constructional details of the model will be dealt with fully in a series of special articles of which this is the first. The model is designed on the unit principle, so that, instead of the whole structure being laboriously erected by the gradual addition of single parts, the main portions may first be built as separate units.

Each unit is as simple to construct as a small


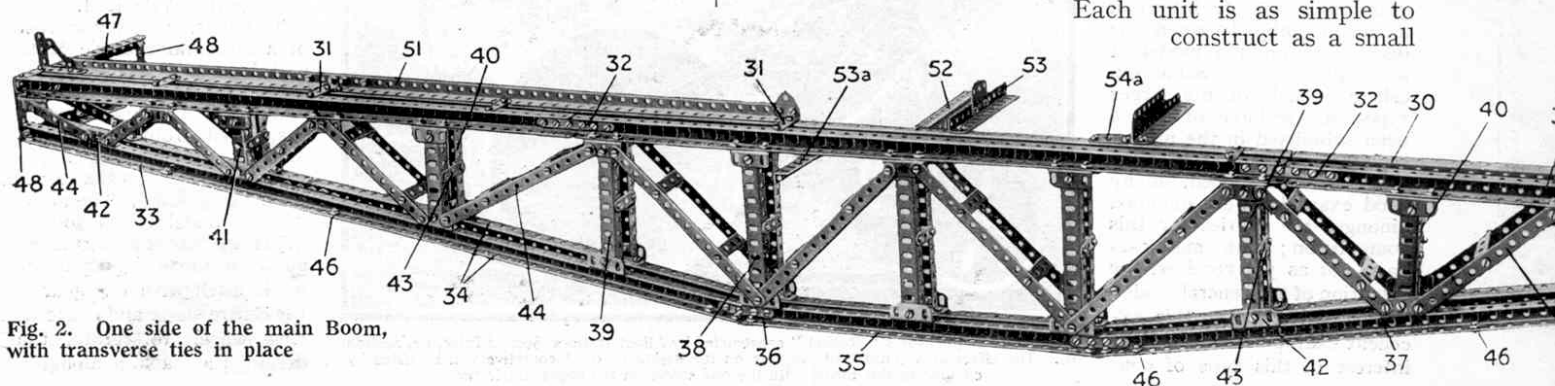


Fig. 2. One side of the main Boom, with transverse ties in place

The Largest Meccano Model

ne

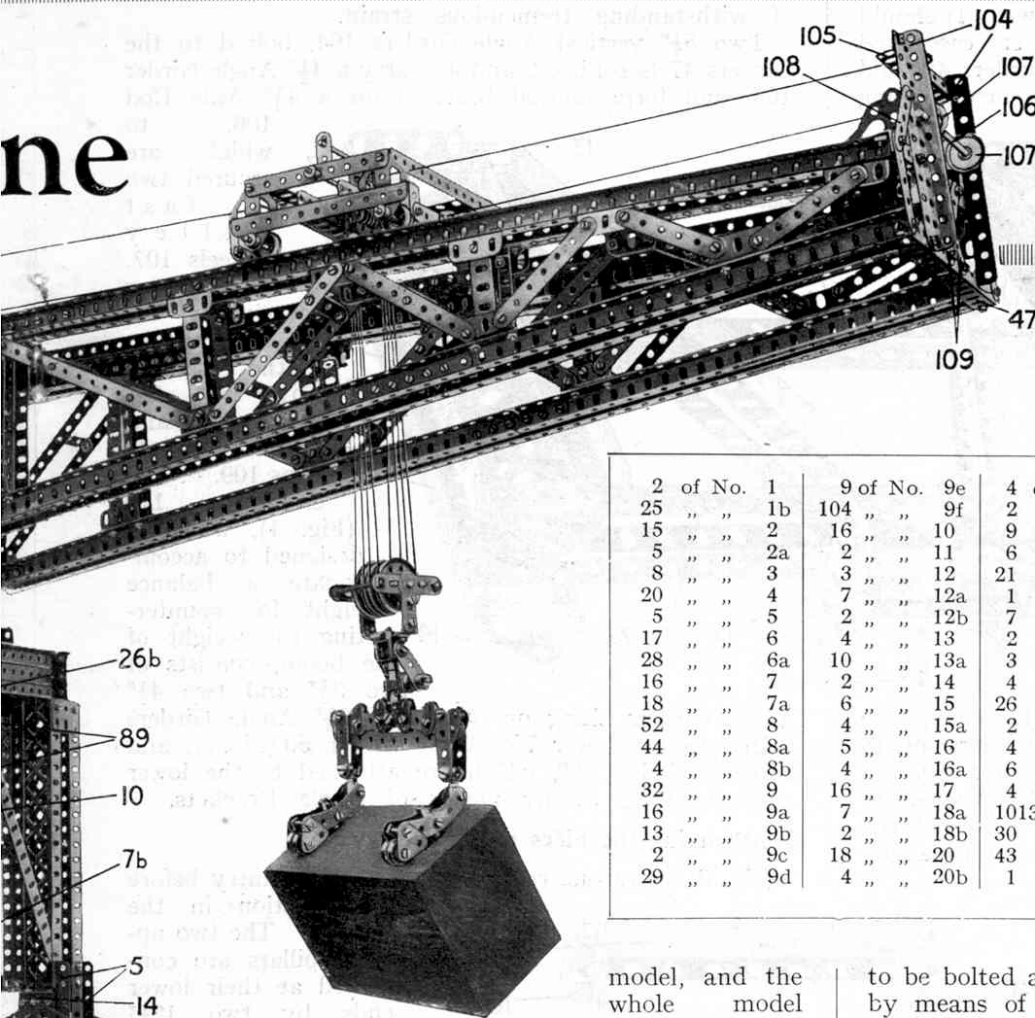

Parts required:

2 of No. 1	9 of No. 9e	4 of No. 21	4 of No. 46	4 of No. 103f
25 " " 1b	104 " " 9f	2 " " 22	57 " " 48	9 " " 103h
15 " " 2	16 " " 10	9 " " 22a	4 " " 48a	8 " " 103k
5 " " 2a	2 " " 11	6 " " 23	6 " " 52a	2 " " 106
8 " " 3	3 " " 12	21 " " 24	90 " " 59	6 " " 111
20 " " 4	7 " " 12a	1 " " 25	1 " " 62	7 " " 111c
5 " " 5	2 " " 12b	7 " " 26	12 " " 63	8 " " 113
17 " " 6	4 " " 13	2 " " 26a	1 " " 63c	5 " " 114
28 " " 6a	10 " " 13a	3 " " 27	2 " " 64	6 " " 115
16 " " 7	2 " " 14	4 " " 27a	2 " " 70	8 " " 126
18 " " 7a	6 " " 15	26 " " 30	2 " " 76	12 " " 126a
52 " " 8	4 " " 15a	2 " " 30a	8 " " 77	4 " " 127
44 " " 8a	5 " " 16	4 " " 30c	2 " " 81	3 " " 133
4 " " 8b	4 " " 16a	6 " " 31	1 " " 82	6 " " 136
32 " " 9	16 " " 17	4 " " 32	4 " " 89	2 " " 139
16 " " 9a	7 " " 18a	1013 " " 37	4 " " 90	2 " " 139a
13 " " 9b	2 " " 18b	30 " " 37a	2ft. " " 94	8 " " 140
2 " " 9c	18 " " 20	43 " " 38	1 " " 95b	3 " " 144
29 " " 9d	4 " " 20b	1 " " 45	3 " " 96	3 " " 147b
			8 " " 99a	1 " " 160
			6 " " 103a	1 " " 165
			1 " " 103b	1 " " 166
			1 " " 103c	1 " " 167
			1 " " 103d	

model, and the whole model can be finally

assembled with the aid of a few nuts and bolts.

The present article includes full details for building the Boom, and the sides of the Gantry, etc. In the June "M.M." we shall describe the top of the Gantry and the Roller Race, etc., together with instructions for assembling the various parts of the Gantry, while details of the Gear Box and all particulars necessary to complete the model will appear in later issues.

Structural Details of the Boom

Fig. 2 is a view of one side of the boom: the other side, being exactly similar, has been removed for the sake of clearness. Each side should be built separately in accordance with the instructions given below, and the whole then assembled into the complete unit.



Along the upper edge extend a pair of U-section channel girders 30 and 30a, each composed of four 24½" and two 12½" Angle Girders bolted together in pairs and joined end to end by the 3" Strips 32. Six 1½" Strips 31 hold the channel girders 30, 30a side by side about ½" apart.

The girders forming the lower edge are similarly constructed, the forward end consisting of 12½" channel girders 33 and 18½" channel girders 34. The slotted holes of the Girders allow them

to be bolted at an angle to the 12½" centre Girders 35 by means of 2" Strips 36. The Channel Girders 37 are attached in the same manner and are composed of 18½" Angle Girders.

The upright Angle Girders 38, 39, 40, 41, which are respectively 5½", 4½", 3½" and 2½" long, are bolted to the upper Girders 30, 30a, and to the lower Girders 35, 34, 33 and 37 by means of 1½" Angle Girders 42, and are connected by 1½" Strips 43, while the oblique struts 44, the different lengths of which are clearly seen in Fig. 2, are bolted to the Girders 42 and joined

Two huge Block-setting Cranes at work on harbour construction

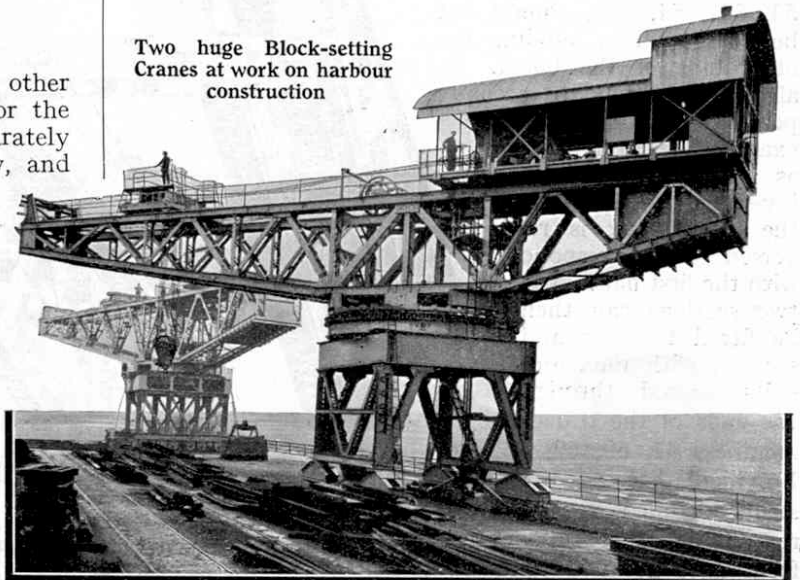

by $1\frac{1}{2}$ " by $\frac{1}{2}$ " Double Angle Strips as shown. It should be noted that the Strips 44 are not in every case fixed to the same point on the short Angle Girders 42, and that, although there is no upright Girder (corresponding to 38, 39, 40, 41) near the extreme end of the boom, the short Girder 42 is included in order that the Strips 44 may be attached to it. The lower channel girders are joined in the same way as the upper girders 30, 30a by $1\frac{1}{2}$ " Strips at the points 46.

On the forward end of the boom are bolted two $7\frac{1}{2}$ " Angle Girders 47 connected by $2\frac{1}{2}$ " Strips 48, while the opposite end of the boom bears two $3\frac{1}{2}$ " Angle Girders 49, to which are attached the $7\frac{1}{2}$ " Angle Girders 50.

The rail 51 is bolted under the Strips 31 to the Girder 30, its end hole coinciding with the third hole of the girder, and is provided with stops consisting of a Flanged Bracket and a 1" Triangular Plate.

The end of a $5\frac{1}{2}$ " Angle Girder 52 is bolted in an inverted position to the inside upper edge of the Girder 30: two similar girders are attached to the upper edge of the Girder 30, and carry respectively a $1\frac{1}{2}$ " and a $3\frac{1}{2}$ " Flat Girder. Another $1\frac{1}{2}$ " Flat Girder 54a is bolted lengthwise by its slotted holes to the Channel Girder 30. A $5\frac{1}{2}$ " Angle Girder 53a is bolted as shown to one of the vertical Angle Girders 38.

The parts 47, 48, 50, 52, 53, 53a, 54, 54a, should not be duplicated in building the other side of the boom. In all other respects the second portion is constructed in exactly the same manner as the first, but in an inverse direction, i.e., the whole unit is reversed to correspond with the first half. The two sections can then be fitted together and secured with nuts and bolts passed through the ends of the transverse members 47, 50, 52, 53, etc. Provided that all the ties and struts included in the illustrations are reproduced the complete boom will form an extremely rigid unit, capable

of withstanding tremendous strain.

Two $5\frac{1}{2}$ " vertical Angle Girders 104, bolted to the Girders 47 (see Figs. 2 and 4), carry a $4\frac{1}{2}$ " Angle Girder 105, and form journal bearings for a $4\frac{1}{2}$ " Axle Rod

106, to which are secured two 1" fast Pulley Wheels 107. Further rigidity is imparted to the structure

by two $2\frac{1}{2}$ " Strips 108 and the crossed $\frac{1}{2}$ " Strips 109. The "cradle" 110 (Fig. 1), which is designed to accommodate a balance weight for counteracting the weight of the boom, consists of two $3\frac{1}{2}$ " and two $4\frac{1}{2}$ "

Angle Girders slung on a pair of $2\frac{1}{2}$ " Angle Girders bolted to the lower $7\frac{1}{2}$ " Angle Girder 50 (Fig. 2), and two $1\frac{1}{2}$ " Strips 111, which are attached to the lower channel girder 37 by means of Angle Brackets.

Constructing the Sides of the Gantry

Fig. 3 shows one complete side of the gantry before incorporation in the model. The two upright pillars are connected at their lower ends by two $12\frac{1}{2}$ " Angle Girders 7, 7a, and higher up by the cross-piece 8 (another $12\frac{1}{2}$ " Angle Girder), and are further supported by the struts 9 (four $9\frac{1}{2}$ " Angle Girders). Each of the pillars consists essentially of four $9\frac{1}{2}$ " Angle Girders 10 bolted at their lower ends to the Girders 7, 7a, and joined by Braced Girders 11 and Flat Girders 12.

The Girders 7, 7a carry four Flat Trunnions 14 and a framework consisting of two $2\frac{1}{2}$ " Flat Girders 15 bolted to the $2\frac{1}{2}$ " Angle Girders 16 and joined by $2\frac{1}{2}$ " Double Angle Strips 17, which form bearings for a $2\frac{1}{2}$ " Rod carrying the Coupling 18 on its inner end. This Rod is also secured in the lowest transverse hole of a Coupling 19, in the end of which is gripped a 1" Rod passing through the centre hole of the Girder 7.

(To be Continued)

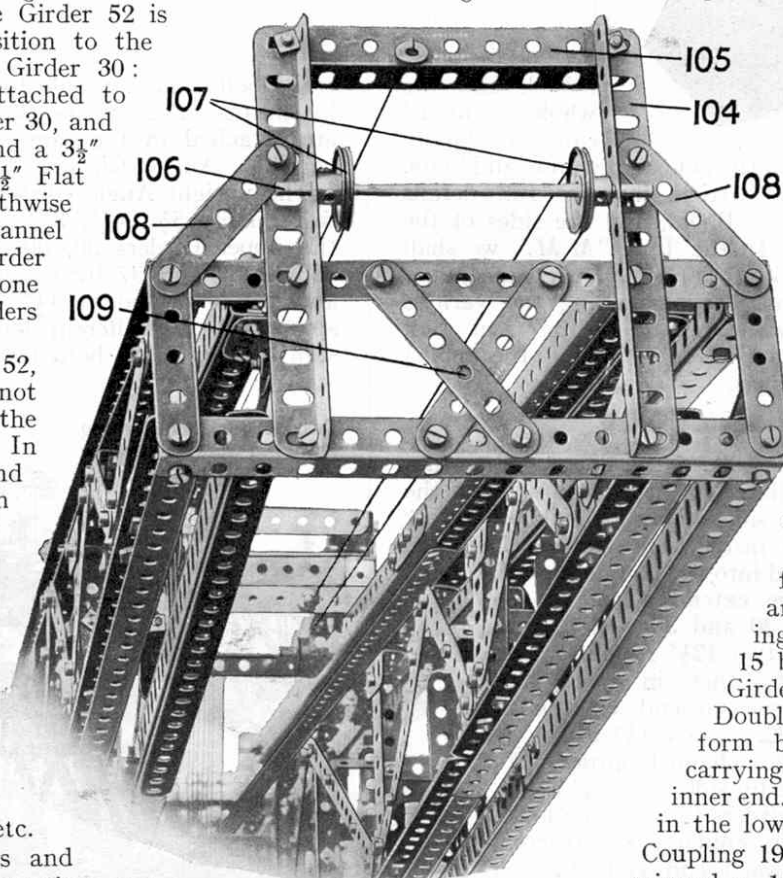
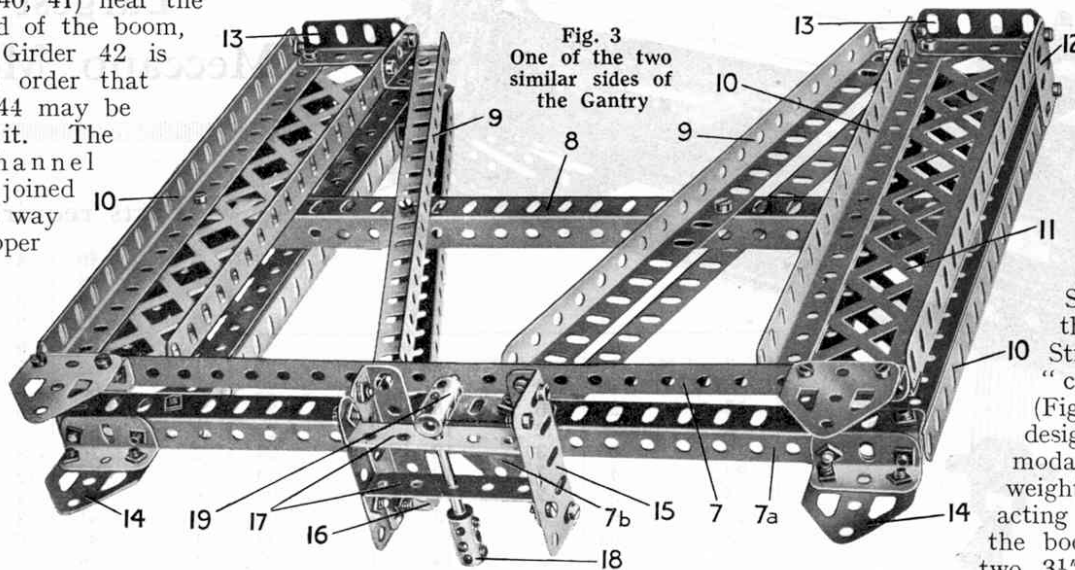



Fig. 4
End perspective view of
Boom

Super Model No. 4:

Block-setting Crane

(Continued from last month)

The Largest Meccano Model

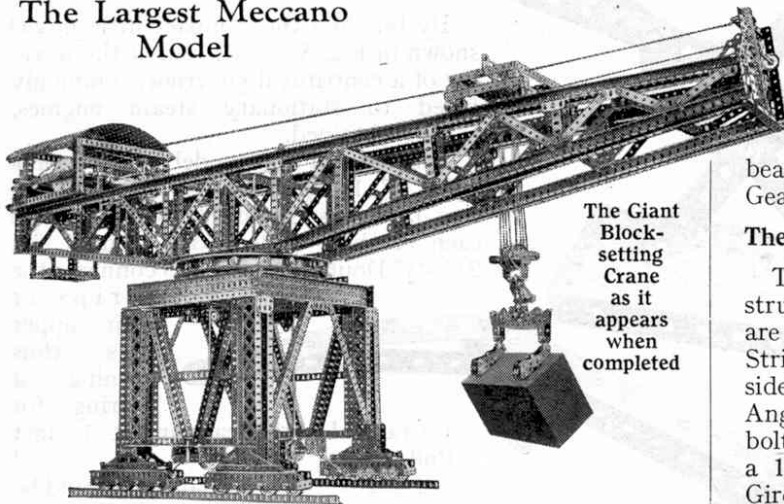

The Giant Block-setting Crane as it appears when completed

THE first article on the Meccano Giant Block-setting Crane appeared last month, and contained details of the use of this type of crane in the construction of harbours, breakwaters, etc., and also instructions for building the Boom and part of the Gantry of the Meccano model itself.

As stated last month this model has been designed on the unit system, i.e., each of the principal portions of the crane are first constructed as separate models, and the portions finally assembled with the aid of a few nuts and bolts.

Provided the Boom and Gantry pillars have been built up, the builder may next turn his attention to the construction of the top of the Gantry. Instructions for building this, together with details of the travelling gear and Roller Race are published herewith.

Top of Gantry (Figs. 6 and 8)

Begin this part of the crane by building four composite girders, each consisting of two $12\frac{1}{2}$ " Flat Girders with the round holes of one overlapping the elongated holes of the other throughout their length, four $12\frac{1}{2}$ " Angle Girders being bolted to the two edges to form an H-section joist. The four built-up joists or girders are now bolted together as shown in Fig. 6, making a rectangular framework. Two $12\frac{1}{2}$ " Angle Girders 20, bolted across the top of this framework, carry $1\frac{1}{2}$ " Angle Girders 21, while the $12\frac{1}{2}$ " Angle Girders 22, 23, join the inside middle points of the pairs of Girders 24, 25 respectively. Two $2\frac{1}{2}$ " Angle Girders 26 are attached to similar Girders bolted to the rectangular framework, and two identical Girders 26a are fastened in the same way to the Girder 22. A $2\frac{1}{2}$ " Angle Girder 26b may be seen bolted to the underside of the Girder in

the foreground of Fig. 6, and a corresponding part should be fitted to the back of the frame.

Across the bottom of the framework are two $12\frac{1}{2}$ " Angle Girders 27, and two Flat Trunnions bolted to the middle points of these Girders, together with the $1" \times 1"$ Angle Bracket 28, form bearings for the 8" Rod 29, to which three $\frac{7}{8}"$ Bevel Gears 97, 98 are secured in the positions shown.

The Bgies

The four bogies on which the crane runs are constructed as follows: Two Flat Girders 1 and 1a (Fig. 9) are joined at their ends by $1\frac{1}{2}"$ by $\frac{1}{2}"$ Double Angle Strips. Two $5\frac{1}{2}"$ Angle Girders 2, bolted to the inner sides of the Flat Girders, are joined by $1\frac{1}{2}"$ by $\frac{1}{2}"$ Double Angle Strips that carry two pairs of Girder Frames bolted flat together. The Girders 2 are also joined by a $1\frac{1}{2}"$ Angle Girder supporting two upright $2\frac{1}{2}"$ Angle Girders 5. A $2\frac{1}{2}"$ by $1"$ Double Angle Strip 6 is bolted to the outer side of one of the Girders 1, 1a. Two of the four bogies are built with this Strip 6 on the Girder 1, while in the remaining two it is on the Girder 1a, so that, when finished, one pair of bogies should be exactly the same in appearance as the other pair would look if viewed with the aid of a mirror in the reverse position.

Assembling the Gantry

The top, sides, and bogies of the gantry having now been built as separate units, the gantry itself may be completely assembled.

Fig. 8 is a sectional view of a portion of the gantry, some parts of which have been removed for the sake of

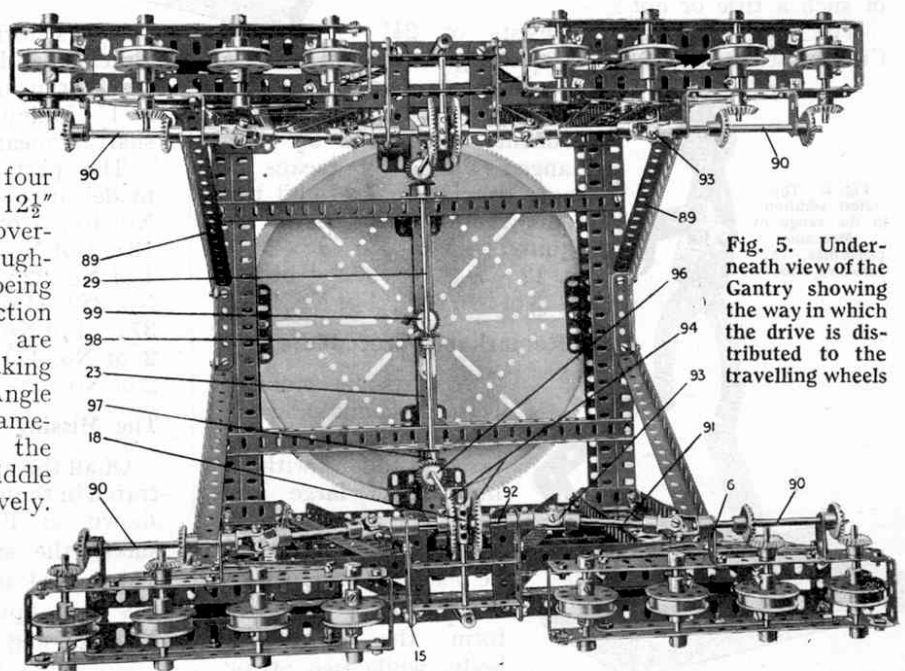


Fig. 5. Underneath view of the Gantry showing the way in which the drive is distributed to the travelling wheels

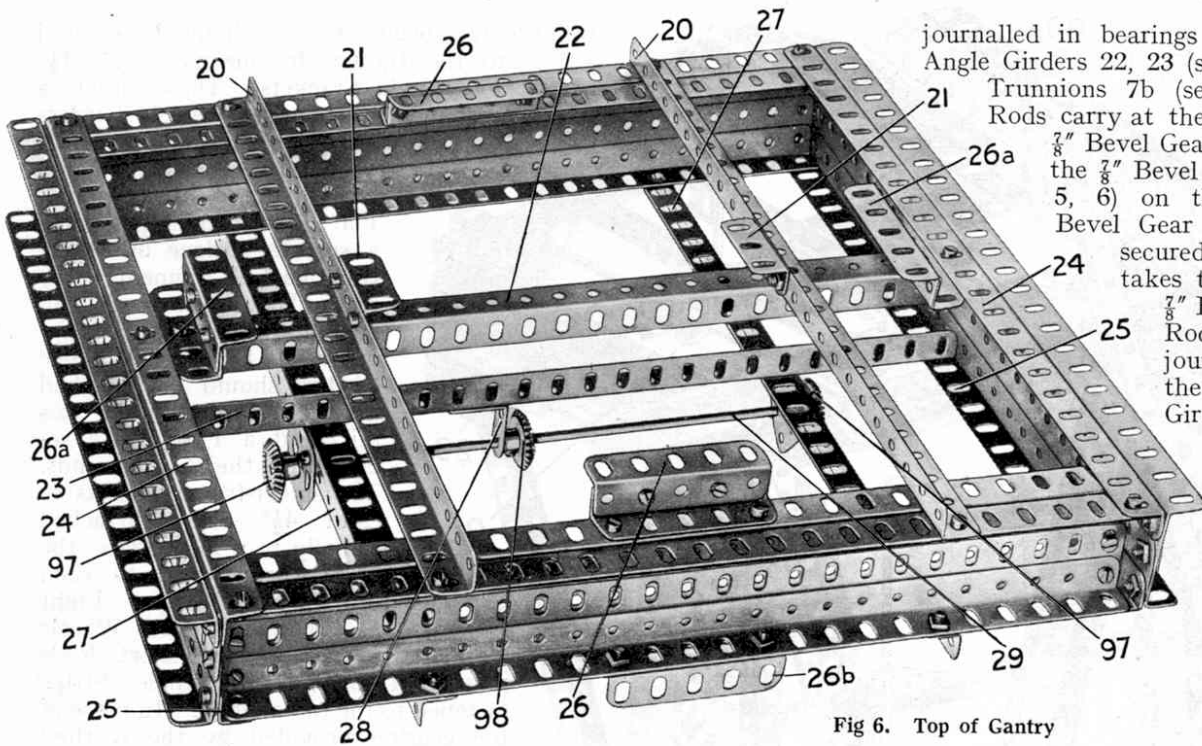


Fig 6. Top of Gantry

journalled in bearings consisting of the Angle Girders 22, 23 (see Fig. 6) and the Trunnions 7b (see Fig. 3). These Rods carry at their upper ends two $\frac{7}{8}$ " Bevel Gears 96 meshing with the $\frac{7}{8}$ " Bevel Gears 97 (see Figs. 5, 6) on the Rod 29. The Bevel Gear 98, which is also secured to the Rod 29, takes the drive from the $\frac{7}{8}$ " Bevel Gear 99 on a Rod 100 that is journalled in one of the top transverse Girders of the boom and in the centre bosses of the roller-bearing unit, and carries at its upper end a $\frac{7}{8}$ " Bevel Gear 101 engaging with a similar wheel on the Rod 102, which is driven from an Electric Motor via the

clearness. It gives a good view of the mechanism that operates the driving wheels, and also shows quite plainly the means by which the various units are fastened together. The 2" Angle Girders 13 (Fig. 3, see last month's article) are bolted underneath the main composite girders of the top portion of the gantry (Fig. 8) and the Girders 10, 26b (see general view) are braced by two $9\frac{1}{2}$ " Angle Girders 89 (Fig. 8). The Girders 5 of the bogies (see Fig. 9) are bolted to the outer sides of the Girders 10 on the gantry and the Girder Frames 4 to the Trunnions 14.

Each bogie is provided with two trailing and two driving wheels each made by butting together a Bush Wheel and a Flanged Wheel and securing them to the axle, which in the case of the trailing wheels is a 2" Rod and in the case of the driving wheels a $2\frac{1}{2}$ " Rod. The driving wheels are operated by $\frac{7}{8}$ " Bevel Gears meshing with similar gears on the $3\frac{1}{2}$ " Axle Rods 90, which are journalled in the Double Angle Strips 6 (see Fig. 9). A Washer is placed on each driving axle to keep the $\frac{7}{8}$ " Bevel Gears in correct engagement.

Each of the Rods 90 is connected by a 2" Rod 91 and two Universal Couplings 93 to a $1\frac{1}{2}$ " Bevel Gear 94, secured to a $1\frac{1}{2}$ " Axle Rod 92. The four Rods 92, to which the Bevels 94 are secured, are separate $1\frac{1}{2}$ " Rods entering opposite sides of the Couplings 18: their other ends are journalled in the Flat Girders 15, and they are held in position by fixed Collars. The four Bevel Gears 94 engage with two $\frac{1}{2}$ " Bevels secured to Rods that are

mechanism of the gear-box, and causes the four bogies to travel simultaneously along the rails. Hence the model is actually propelled by eight of its sixteen wheels.

The Roller Bearing (Fig. 7)

The large roller bearing, by means of which the boom of the crane is able to turn smoothly in any direction, may be purchased, together with the small toothed wheel, as a complete unit. The upper Geared Disc, which forms the movable race, is bolted to the


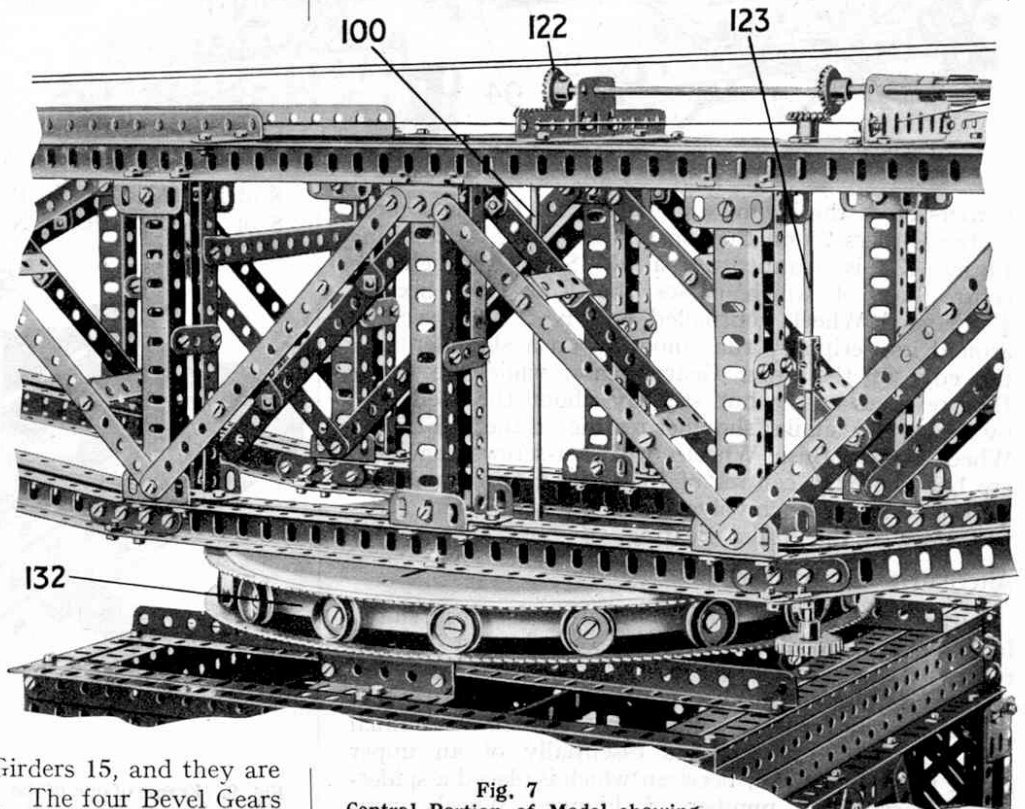


Fig. 7
Central Portion of Model showing
roller bearings supporting the Boom

Fig. 8. View of Gantry with one side removed. The bevel gearing and angular drive can be seen clearly

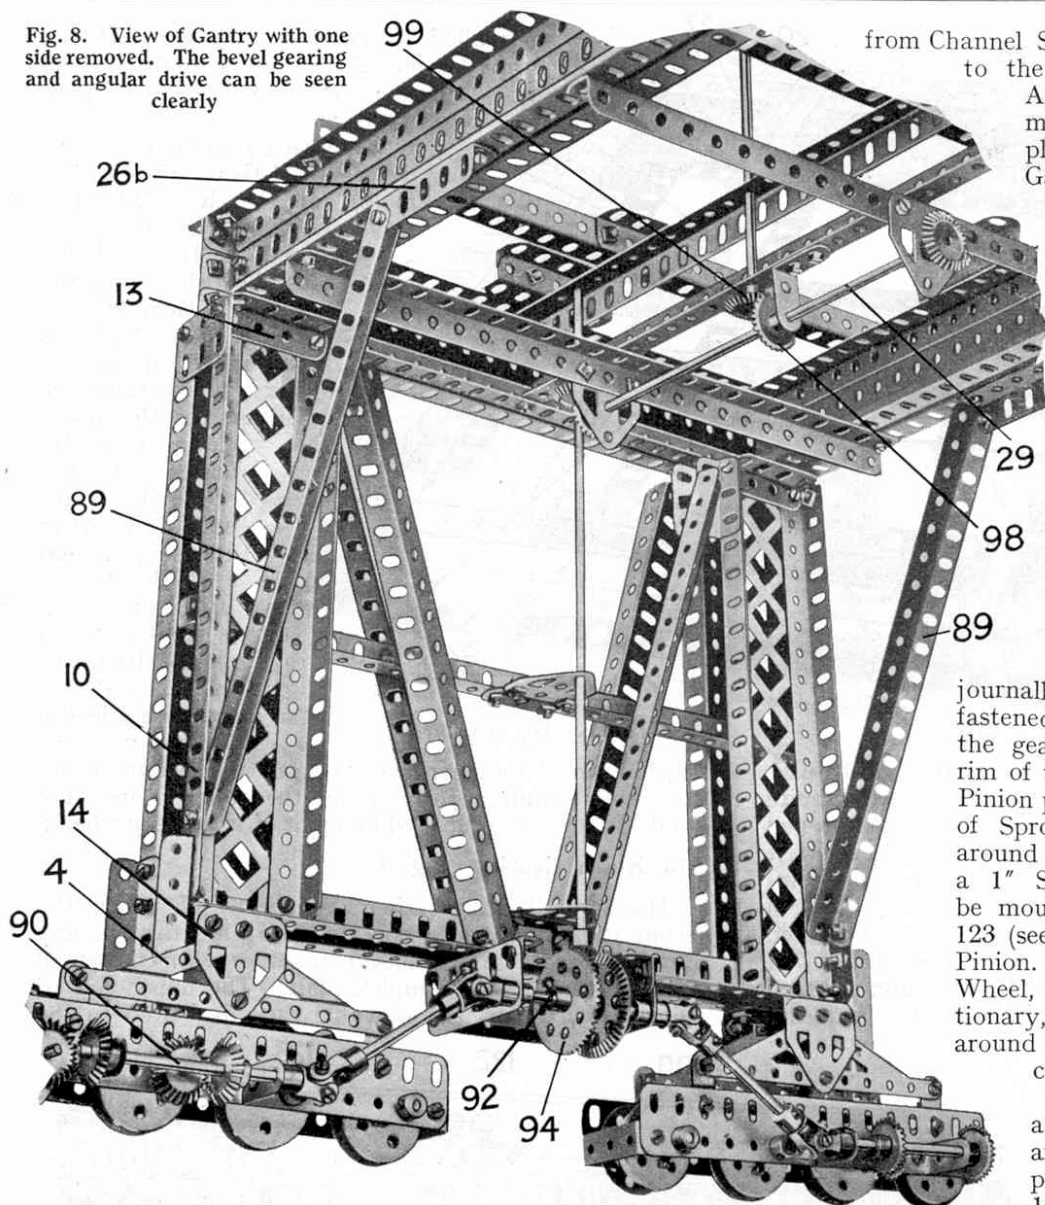

Girders 35 of the boom, while the lower Disc is secured to the Girders 26 on the top of the gantry. The Ring Frame 132 is spanned by a $9\frac{1}{2}$ " Strip, through the centre hole of which passes the Rod 100. Sixteen $\frac{3}{4}$ " Flanged Wheels journalled on Pivot Bolts secured around its periphery run smoothly on a shoulder near the edge of the lower Geared Disc, while the upper Disc revolves easily but steadily about the Rod 100, by means of a similar shoulder resting on the $\frac{3}{4}$ " Flanged Wheels. Two Bush Wheels, with set-screws removed, are bolted to the centres of the Geared Discs, and the Rod 100 is free to revolve in their bosses quite independently of the Roller Bearing.

Alternative Construction

Although the Geared Roller Bearing is most suited for use in this model, it is possible to construct a built-up roller bearing, similar in many respects to part No. 167, from standard Meccano parts. The bearing is described fully in the new Standard Mechanisms Manual (see S.M. 131) and consists essentially of an upper and a lower guide rail, between which is placed a spider-frame carrying a number of Flanged Wheels comprising the rollers. The lower guide rail is built-up

from Channel Segments, and should be secured to the Gantry by means of $1" \times 1\frac{1}{2}"$ Angle Brackets. These Brackets may be bolted to Angle Girders placed flush with the top of the Gantry, but a better plan would be to fill in the entire top with Flat Plates, thus providing a smooth surface on which the Channel Segments may rest. The upper guide rail is composed of Channel Segments. Eight $4\frac{1}{2}"$ Angle Girders should be attached in radial formation to this rail, and a Face Plate secured to their inner ends. The spider-frame consists of eight $4\frac{1}{2}"$ Strips attached radially to a Face Plate, the Strips being held to each other by $3\frac{1}{2}"$ Strips. Eight $1\frac{1}{8}"$ diam. Flanged Wheels are secured to short Rods journalled in Double Angle Strips fastened to the radial arms. In place of the gearing provided by the toothed rim of the Roller Race and the special Pinion provided with this unit, a length of Sprocket Chain should be passed around the fixed guide rail, and over a 1" Sprocket Wheel, which should be mounted upon the composite Rod 123 (see Fig. 7) in place of the special Pinion. On rotation of the Sprocket Wheel, the Chain will remain stationary, whilst the Sprocket will travel around it, and the boom of the crane consequently rotated.

If this form of construction is adopted the following alterations are necessary to the list of parts required. For part No. 167 substitute:—8 of No. 2a; 8 of No. 3; 8 of No. 9a; 16 of No. 12b; 8 of No. 16a; 8 of No. 20; 76 of No. 37; 16 of No. 38; 8 of No. 48; 8 of No. 59; 3 ft. of No. 94; 2 of No. 109; 16 of No. 119; 8 of No. 125.

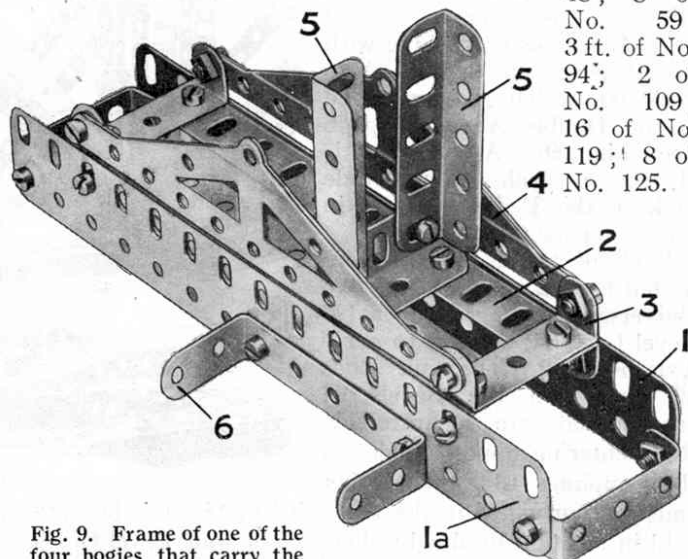


Fig. 9. Frame of one of the four bogies that carry the travelling wheels